

FIBER MANAGEMENT

FTTX BOX

INDOOR/OUTDOOR TERMINATION BOX



SFOD02



Product Introduction

- It is applicable to wall-mounted for indoor and outdoor.
- It is suitable for 8 pieces SC adapters installation and usage.
- The max capacity is 12 fibers for pigtail direct fusion.
- It is allowed to preinstall PLC optical splitter with the max.Optical distribution ratios 1:8,and the box can be locked.
- It is achieved to IP65.


Function	Termination of optical fiber / Passive optical fiber distribution
Optical splitter type	Micro style
Splitter installation	Fixed support bracket
Adapter	SC type (FAST)
Max OD ratios	1:8
Optional optical cables	Figure 8 soft cable/general outdoor cable/indoor wiring cable
Dimension	220X180X50mm

WALL OUTLET-SFID02

Product Introduction

- This box could be used for wall-mounted and rack-mounted applications.
- The base and cover of the box adopts "self-clip" method, which is easy and convenient to open and close.
- Could be used for adapters such as SC, FC, E2000.
- The max capacity is 4 fibers.
- It is achieved to IP52.

Function	Termination of optical fiber
Adapter	SC, FC, E2000
Optional optical cables	General indoor wiring cable
Dimension	150X110X30mm

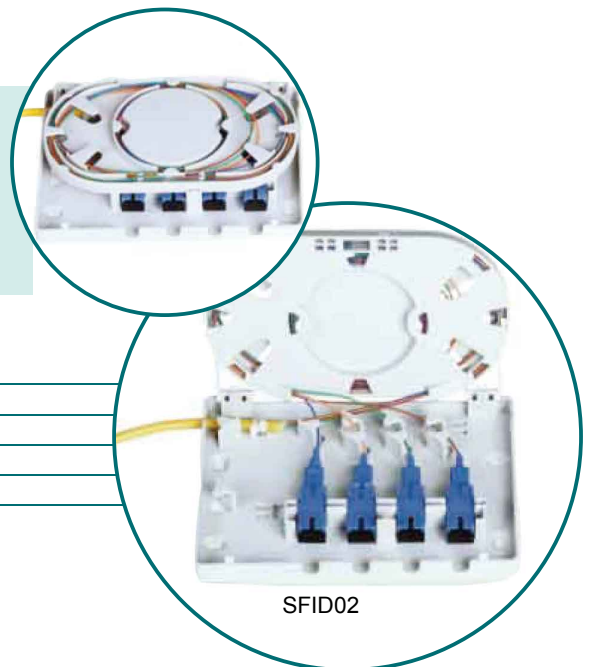

SFID02