

FIBRE OPTIC ASSEMBLIES

OS1 PATCHCORDS



Description

The SofeTEK Optical fiber patchcords are manufactured using the best quality components. The connectors are the market leading SofeTEK range of connectors and the cable exceeds all areas of the standards required for the assembly being produced.

Non-standards patchcords lengths can quickly be made to satisfy any requests in our production facility. This encompasses all of the essential tools to ensure the products not only meet but also exceed the requirements laid down in IEC international standards for fiber optic terminations.


| Optical Performance (Multimode) | Optical Performance (Singlemode) | | Optical Performance (MT-RJ) |
|---------------------------------|----------------------------------|--|--|
| Insertion loss | Insertion loss | Return Loss | Insertion loss |
| Max. 0.3 dB Typical 0.15 dB | Max. 0.3 dB Typical 0.15 dB | UPC better than 50 dB APC better than 60 dB | Max. 0.7 dB Typical 0.5 dB (IEC 874-1 method) |

Product Packaging

Each patchcord is packaged individually and individually identified for traceability, test certification is supplied for each assembly.

ORDERING INFORMATION

To order optical fiber assemblies the SofeTEK part number follows the following sequence.

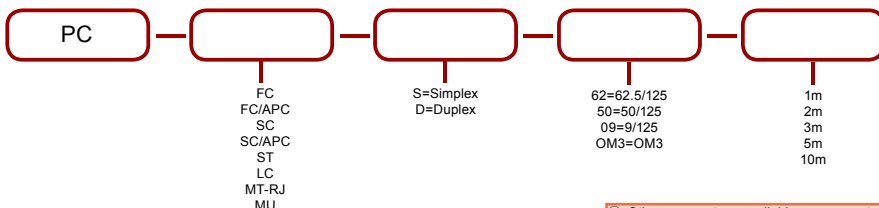

- ① Other connectors available on request.
- ② MT-RJ is only available in MiniZip.
- ③ Other lengths available on request.